Samsung 460DR-2 46" Outdoor LCD Display

Versatility makes it the best LCD under the sun.

BEVERAGES

| -041162 | |
|---|------|
| Strawberry | 1.35 |
| Mango | 1.35 |
| Black Tea | 1.75 |
| Eastern Beauty | 1.65 |
| Pomegranate Lemonade | 1.75 |
| Herbal Teas ~Non-Caffeinated~ (all flavors) | 1.35 |
| Berry Power | 1.75 |
| Honey Green Tea * | 1.55 |
| Jasmine Green Tea | 1.25 |
| aroon rea | 1.25 |
| | |
| | |

SANDWICHES Cuban Chicken on Focac Chipotle Chicken on Toasted Fre noked Turkey on Three Cheese 5.35 5.75 Tomato & Mozzarella on Ciabatta 5.65 5.75 5.35 5.75 5.55

Grilled Chicken on Focaccia Bacon Turkey Bravo on Tomato Bas Chicken Caesar on Three Cheese Italian Combo on Ciabatta Asiago Roast Beef on Asiago Che 5.25 5.25 Smoked Ham & Swiss on Rye

The 460DR-2 Brings Flexibility and Full HD Resolution to Outdoor Signage

No two businesses communicate with customers in exactly the same way. That's why there's the Samsung 460DR-2 outdoor LCD display. It's a panelonly solution, so it can be placed in a customized enclosure, meeting the unique messaging needs of any business. It can be used as a menu board at a drive-through restaurant. Or as outdoor signage at an amusement park or sporting venue. Even to play movie trailers outside a theater. With a super high brightness level of 1500 nits and full HD resolution, messages are impactful even in bright outdoor light. And connectivity is professional level, including VGA, DVI, DisplayPort, Composite, Component and HDMI. The Samsung 460DR-2. Impactful outdoor messages for all. Business. Innovated.



-**)**\$-4,000:1

Easy Customization

The 460DR-2 is an open frame solution, so it lends itself to a wide variety of outdoor uses.

High Brightness, High Contrast

1500 nits brightness and 4000:1 contrast ratio assure excellent visibility in outdoor settings with bright ambient light conditions.

Polarized Display

The 460DR-2's special monitor film provides bystanders with a perfect view of the on-screen imagery while wearing sunglasses.

Full HD Resolution

The 460DR-2 offers full HD 1920 x 1080 resolution, adding richness and depth to the image quality.

RJ45 MDC and DisplayPort

DisplayPort delivers enhanced connectivity and an improved display interface, while an upgraded Multi Display Control solution enables control of multiple monitors via their embedded RJ45 interfaces.



SBB-A Media Player

The display's open-frame solution is compatible with the SBB-A media player, adding network capability as well as MagicInfo[™] Premium software (the first 5 licenses are free).



Learn more 1-800-SAMSUNG 1-866-SAM4BIZ samsung.com/prodisplay or samsung.com/business

460DR-2 Outdoor LCD Displays



| Display | Model Number | 460DR-2 |
|--------------|--|--|
| | Screen Size | 46° CCFL |
| | Panel Technology | S-PVA (60Hz) |
| | Resolution | 1920 x 1080 |
| | Brightness | 1500 nits |
| | Contrast Ratio (Typical) | 4000:1 |
| | Viewing Angle (Horizontal/Vertical) | 178'/178' |
| | Response Time | 8ms |
| Connectivity | Input | VGA (D-Sub 15 Pin), DVI-D, DisplayPort, Composite, HDMI (x2) Component (D-Sub 15 Pin), Stereo Mini Jack |
| | Output | Stereo Mini Jack |
| | External Control | RJ45, RS232C (n/Out) |
| Power | Power Supply | AC 100 - 240 V (+/- 10 %), 50/60 Hz |
| | Power Consumption (Typical/Max) | 345W / 420W |
| | Power Consumption (Standby) | Less than 1W |
| nvironmental | Operating Temperature | 0°C - 40°C |
| Conditions | Operating Humidity | 10 - 80% |
| Features | Special | Panel Kit Only, Air Conditioning Guide, Lamp Error Detection, Anti Retention, Temperature Sensor, RS232C/RJ45 MDC, Plug and Play (DDC2B), PIP/PBP, Video Wall (10x10), Pivot Display, Button Lock, Smar Scheduling, Smart F/W update |
| | Integrated Tuner | NA |
| | Media Player Type SBB-A (Optional Accessory), SBB-AD7 (Optional Accessory) | SBB-A (Optional Accessory), SBB-AD7 (Optional Accessory) |
| | VESA Standard Wall Mount Interface | 400 x 400mm |
| Dimensions | Product Dimensions (without stand) | 41.2" x 24.9" x 6.0" |
| | Packaging Dimensions | 45.7" x 29.7" x 12.8" |
| | Bezel Width | NA |
| Weight | Product Weight | 52.8 lbs. |
| | Shipping Weight | 66 lbs. |
| Service | Standard Warranty | 3-Year Parts/Labor/Baoklight |
| Accessories | Included | Quick Setup Guide, Warranty Card, Application CD, Power Cord, Remote Controller, Batteries |
| 40003501105 | Optional Mount | NA |
| | Optional Stand | NA |
| Green | Emission Standard | EMC |
| anagement | Energy Star 5.0 Compliant | NA |
| | RoHS Compliant | Yes |
| | nono compitant | |


CONNECTIVITY

SAMSUNG

| 1. VGA In |
|--------------|
| 2. Audio In |
| Z. AUGIO ITI |

3. Component/ Composite In

- 4. Audio Out
- 5. RS232C In/Out 5. R5232C In/C 6. DVI In 7. DisplayPort 8. HDMI x 2 9. RJ45 LAN

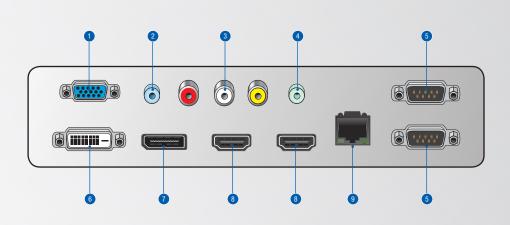

For complete product information and accessories, visit samsung.com/prodisplay or samsung.com/business

Follow us: S@SamsungBizUSA | You Tube youtube.com/user/samsungbizusa

Product Support: 1-800-SAMSUNG 1-866-SAM4BIZ 02013 Samsung Electronics America, Inc. Samsung is a registered mark of Samsung Electronics Corp., Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective manufacturers and companies. Simulated screen images. See samsung.com for detailed information. Printed in USA. LFD-460DR2B2BDSHT-APR13T